

Research Article

An FSK based industrial analog signal transmission

Po-Yun Shih¹, Chung-Wen Hung¹, Chau-Chung Song²¹Department of Electrical Engineering, National Yunlin University of Science & Technology, 123 University Road, Section 3, Douliou Yunlin 64002, Taiwan²Department of Aeronautical Engineering, National Formosa University, 64 Culture Road, Huwei Yunlin 63201, Taiwan

ARTICLE INFO

Article History

Received 24 October 2019
Accepted 24 July 2020

Keywords

FSK
Wireless
Industrial communication
Active filter

ABSTRACT

An FSK (Frequency-Shift Keying) based industrial analog signal transmission is proposed in this paper. Due to the advantage of digital transmission, such as noise immunity and error check, the digital transmission is more and more popular. The FSK is a simple kind of basic digital transmission. Although the analog signal modulation is already well-known and mature, but it is easily interfered by the noise, especially in an industrial environment. When the carried frequency is occupied, the alternative frequency is necessary. However, it is a tough work for sure. The FSK based wireless transmission is used to perform a wireless transmission of analog signal in the industry. It also has good effects of removing the wiring from device to device, and breaks the restriction of the device movement. Experimental results show that the proposed method can work well, and the wireless transmission bandwidth achieves 16kHz.

© 2022 The Author. Published by Sugisaka Masanori at ALife Robotics Corporation Ltd.
This is an open access article distributed under the CC BY-NC 4.0 license
(<http://creativecommons.org/licenses/by-nc/4.0/>).

1. Introduction

In recent years, the IoT (Internet of thing) concept is more and more concerned by every citizen. It is not only used in a residential environment, but can also be utilized for both agricultural and industrial application. The “IIoT” (Industrial Internet of thing) will also be proposed by this trend. The concept of IIoT focus more and emphasizes the communication of machine to machine, and machine to user, so interface between the facility’s sensor is the key point of this concept [1],[2].

The connection between the machines always uses the physical wire in the traditional way. However, the defect is the signal type and transmission way might be limited by the distance [3]. It also causes the system couldn’t change the transmission dynamically at times when the emergency events occur. [4] also uses the MCU (Micro Control Unit) which carry the RTOS(Real-time operating system) to collect multiple sensors data in the industrial environments. In this paper, the wireless connection is concerned to replace the physical wire between the machine to machine. Although the analog signal modulation has been used for a long while, [5] mentions that digital modulation has advantage of better noise immunity,

robustness to channel impairments, easily multiplexing of various forms of information and detect and correct transmission errors by accommodated digital error-control codes.

Because of the reasons stated above, the goal on this paper is put the eye on transmit the analog signal by digital modulation. The paper is focused on the analog signal because there are many continuous analog signal on a machine, such as voltage, current or temperature of the machine. [6] collects all the information to monitor by digital wireless transmission, then the emergency events are detected by comparing the original waveform. In [7], the MCU is used to sample the analog signal from sensors in the industrial environment, and the sampled data are transmitted by the wireless signal to the master for monitoring. However, both of two papers never discussed about reconstruction of signal.

2. System Architecture

The main goal of the system architecture proposed in this paper is focused on wireless communication and continuous signal processing. In terms of microcontroller selection, Texas Instruments' LAUNCHXL-CC1310 and Renesas' RX231 is used for system implementation. The

radio modulation method of CC1310 is common FSK/GFSK, and supports multiple frequency-shift keying (MFSK) modulation. The RX231 MCU is mainly used for data buffering and analog-to-digital conversion which the maximum operating frequency is 54 MHz. The peripheral parts support 4-channel DMAC (Direct Memory Access Controller), which can reduce the many input/output interrupts and data transfer tasks for MCU loading.

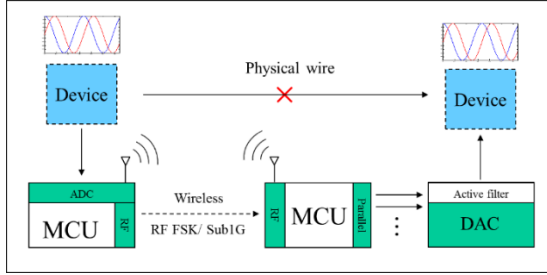


Fig. 1. The figure of system architecture

Fig. 1 shows the proposed system architecture in this paper. It consists of two MCUs. These two MCUs not only response for digital data transformation, the most important thing is to fulfill the wireless communication. Due to the setting in this paper is the unidirectional transmission, the following section is divide into two parts with transmitter and receiver to introduce in detail.

2.1 System Specifications

Although this study is aimed at the transmission of analog signals, the digital signal transmission is also added in the system to be more flexible and closer to practical applications. All the important settings are carefully considered in the system specifications, which mainly include system timing planning, communication transmission specifications, packet length, sampling rate, and throughput.

Under the goal of the highest transmission rate and the lowest delay, the feasibility of the respective conditions is evaluated and verified by the specific experiments to achieve the highest transmission rate under this system architecture. The overall specifications of proposed system and wireless communication are shown in Table 1 and Table 2.

Table 1. System specification table

System Specification	
Channels	4-ch analog channel, 8-bits digital channel
Sampling rate	150 kS/s
Resolution	12-bits
Bandwidth	24 kHz
Latency	20.24 ms
Range	5 m

Table 2. System wireless communication specification

RF Specification	
Frequency Carrier	915 MHz
Modulation	8-MFSK
Transmission rate	4 Mbps
Transmission power	14 dB

In this paper, the application scenarios are mostly internal signal transmission in large-scale equipment or production line in factories. Therefore, in the system specification, the transmission distance of up to about 5 meters can meet most transmission conditions. The farthest transmission distance of the system will be verified in the section of experimental results. Although the sub-1GHz frequency band transmission is applied in this paper, the theoretical transmission distance can be more longer, but because this study adopts 8FSK modulation, compared with the common 2FSK, due to the frequency deviation modulation characteristic so that the receiving sensitivity of 8FSK will be lower. It means that if you want to maintain the same transmission quality, the relative transmission distance will be affected and shortened.

2.2 Transmitter

In the transmitter, the MCU enables a timer to trigger ADC (analog-digital converter) to sample the analog signal. When the sampling amount reaches the goal of RF (radio frequency) packet length, the MCU will turn the RF transmission on to transmit the whole packet to the receiver. Since the hardware blocks of RF and ADC are independent on the MCU. When the MCU performs a RF transmission, the ADC can also keep sampling to the signal, so that the data never lost.

2.3 Receiver

The receiver has the same design with the transmitter. In addition to enabling a timer to turn on the RF reception within a fixed period. The parallel transmission is used to send the digital data from the receiver to the external DAC (digital-analog converter). By the repeatedly receiving and converting, the analog output signal will last continuous conversion.

2.4 Parallel Digital Analog Converter circuit

The DAC7821 IC is adopted in the DAC circuit, which is produced by the Texas Instrument. The reason to use the parallel transmission from MCU to the external DAC circuit is the transfer speed. Due to the requirement for real time convert of the analog signal, the serious communication might cause further delay to the system which is called the latency.

2.5 Active filter circuit

Due to that the system in this paper uses the digital modulation of wireless communication to transmit, the analog signal data will be sampled to non-continuously digital data. Because of the DAC performs the zero-order hold for discrete-time signal, means that the data will also become unsmooth caused by the reconstruction on DAC. The active filter is designed to resolve this problem. The low pass active filter is implemented with a 4 order Butterworth filter. The goal expects that the analog signal within the setting passband can be send wirelessly and successfully and smoothly output results.

3. Experimental Results

In the experiment process, the function generator is used to produce standard sinusoidal waveform. The MCU samples this signal by a fixed period. The transmitter sends the sampling data to the receiver by RF, then the receiver can transmit the data to the DAC circuit. After the conversions on DAC circuit, an oscilloscope is used to observe and compare the output result of the active filter circuit and the input source signal.

3.1 The maximum Bandwidth of system

The highest sampling rate of the ADC and DAC in the paper is set on 160kS/s. The maximum passband width is set in 16 kHz because the expectation of this paper is that the input signal to be at least consistent with 10 digital data to be reconstructed.

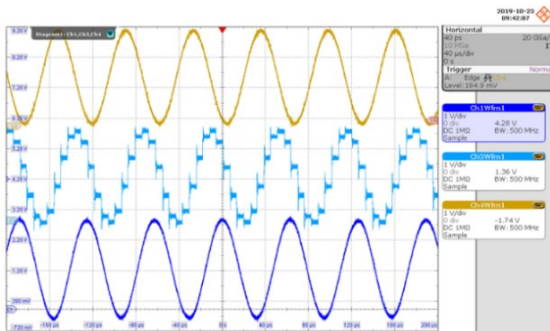


Fig. 2. The comparison of whole system output and input result In the oscilloscope waveform of Fig. 2, Ch4 (brown curve) is the waveform produced by the function generator; Ch3 (light blue curve) is the output after DAC; and Ch1 (indigo curve) is the result of the filter which is also the signal after the reconstruction. The Fig. 2 shows that the 16 kHz sinusoidal wave input signal can be reconstructed by 10 digital data.

3.2 Latency

The latency on the wireless communication is unavoidable. The experiment measures the effect of the latency on the result. The experiment is used an IO output

pin on MCU to indicate the moment from the first ADC trigger. The interval to the first sinusoidal signal of the DAC conversion means the latency. The oscilloscope shows the result which in the Fig. 3, the Ch4 (brown curve) is the input signal; Ch3 (light blue curve) is the result of the DAC circuit output; and the two dotted lines are used to mark the latency time by the rising edge (first trigger) in Ch1 and the first complete of DAC. It is observed that from the first signal sampling to the DAC conversion, the total latency takes about 9.56ms.

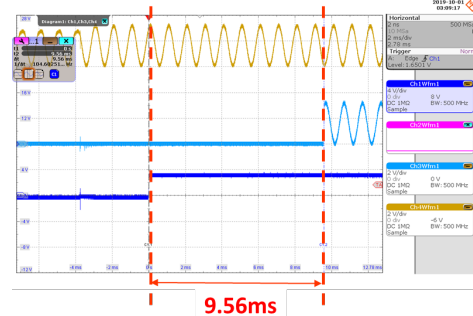


Fig. 3. The latency of input to output

3.3 Timer occupy by Hardware switching

Due to hardware limitation of the MCU, when the CPU is interrupted by RF receiver routine, the output pin can't be set. It causes the system can't update the DAC output in a fixed-length duration time. The reason is that the most of MCU never support hierarchy interrupt, when receiver interrupt, output timer interrupt for DAC update is disable.

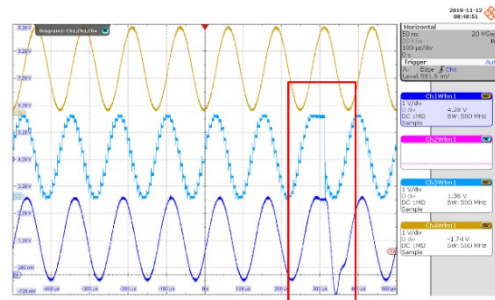


Fig. 4. The situation of hardware switching As shown in Fig. 4, the experiment is performed to measure this non-updating duration. In every 43.75us of transmission frame, there is about 3.2 ms of non-working interval.

3.4 Mixed frequency

The experiment is hoping that the system not just transmits the data with fixed or single frequency, but transmits the reality analog signal. Hence the experiment adds multi frequency to a signal in order to simulate it, and observe the result to know whether reconstruction is

successful or not. This experiment also tests the filter performance of its exact bandwidth.

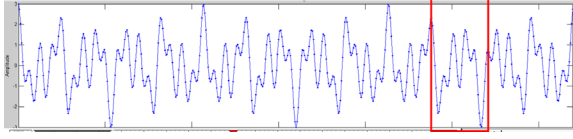


Fig. 5. The waveform data with 4kHz, 8kHz and 16kHz mixed frequency sinusoidal wave

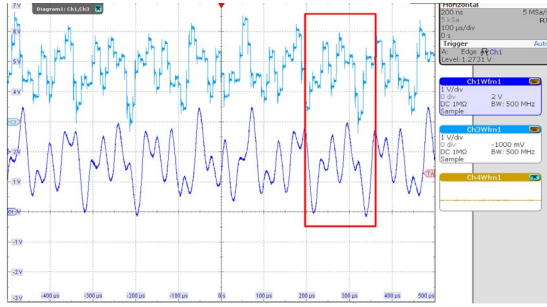


Fig. 6. The DAC output and active filter result of 4kHz, 8kHz and 16kHz mixed frequency sinusoidal wave

First of all, the waveform of the mixed frequency form 4 kHz, 8 kHz and 16 kHz sinusoidal waveform is produced as shown in Fig. 5. The Fig. 6 is measured from the output of DAC circuit. Ch3 (light blue curve) is the DAC output result and Ch1 (indigo curve) is the signal after filter.

The red square in the Fig. 5 and Fig. 6 marks the difference between the original signal and the signal after filter. From the result, it proves that within the 16 kHz bandwidth, all of the signal can reconstruct to the original signal successful.

3.5 Signal noise ratio (SNR)

SNR is defined as the ratio of signal power to the noise power. Since the analog continuous signal is transmitted wirelessly, the SNR is used to judge how much noise is in the output signal. In this paper, the measurement of SNR is based on the frequency domain after the Fourier Transform. Fig. 7 shows the spectrum of the signal waveform. According to the frequency domain, calculate the energy of input signal and the noise except for the input signal. The last, the SNR can be calculated by (1), and it is effective evaluate the system.

$$SNR(dB) = 20 \log_{10} \left(\frac{A_{signal}}{A_{noise}} \right) \quad (1)$$

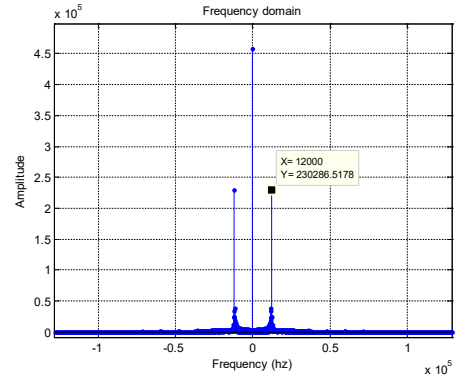


Fig. 7. The frequency domain figure of output result

As mentioned above, due to the system only used MCUs to fulfill the RF reception and multiple IO to transmit the signal data, the reconstructed signal will have some vacant of signal in every transmission frame. The fixed duration reduces the SNR. The related data is measured as shown in Table 3, the lower effect to the lower frequency signal. It also shows the lower signal will have better SNR.

Table 3. SNR of each signal input frequency

	Signal noise ratio	
	1k	152.96dB
Input	2k	116.093dB
Signal	4k	98.0937dB
Freq.	8k	68.1dB
	10k	62.6037dB
	16k	41.3466dB

3.6 System Bandwidth

In the general definition of circuit theory, the frequency of signal strength within the attenuation peak of less than -3dB is called “bandwidth.” In this paper, another important performance index is bandwidth. The two conditions of bandwidth and effective bits are used to select the appropriate transmission input frequency. In the measurement experiment of system bandwidth, a sine wave signal with a peak-to-peak value of 3.3 V is used as the input signal. At this time, the frequency of the signal generated by the signal generator is dynamically adjusted, and the peak-to-peak output signal is observed with oscilloscope. The calculation of equation (2) shows that under the input peak-to-peak sine wave signal of 3.3 V, the voltage peak value of -3dB is about 2.33V.

$$V_m = 20 \log \left(\frac{1}{\sqrt{2}} \right) \approx -3dB \quad (2)$$

Therefore, the method of this experiment is to adjust the frequency generated by the signal generator and observe the peak-to-peak value of the output waveform in the oscilloscope. As shown in Figure 8, CH1 is the waveform generated by the measurement signal generator, and CH2

is the measurement system. For the output waveform, use the function of the oscilloscope to measure the peak-to-peak value. As shown in the red box in Fig. 8, when CH2 is 2.33 V, the current input frequency is a sine wave with a frequency of 24 kHz, so it can be determined the system bandwidth proposed in this paper is 24 kHz.

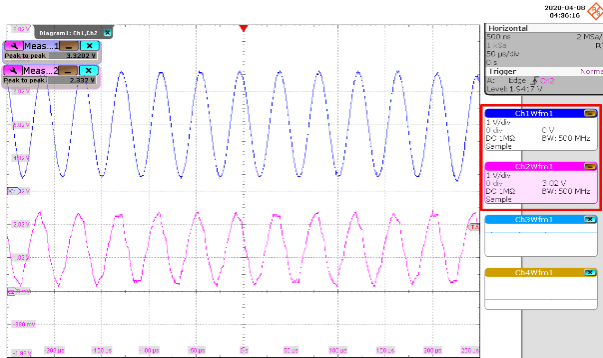


Fig. 8. Bandwidth measurement

4. Conclusion

In this paper, the digital modulation is used to conduct the wireless communication. The system with digital modulation have the advantages of noise immunity and error checking with error-control codes. Moreover, the transmission power and transmission rate can be flexibly adjusted in the digital modulation. As shown in experimental results, that the proposed system could effectively remove the equipment wiring in the industrial environment. Moreover, the system successfully is simulated and evaluated the situation of variety frequency waveform in the industrial environment, and reconstruct the output signal to the original continuous signal with a very low error. The system which implements in this paper is proved that it can transmit the continuous analog signal by the wireless effective.

References

1. S. S. A. Abbas and K. L. Priya, Self Configurations, Optimization and Protection Scenarios with wireless sensor networks in IIoT, 2019 International Conference on Communication and Signal Processing (ICCSP), April 4-6, 2019.
2. Z. Bi, L. D. Xu and C. Wang, Internet of Things for enterprise systems of modern manufacturing, IEEE Transactions on Industrial Informatics, January 16, 2014.
3. Q. Chi, H. Yan, C. Zhang, Z. Pang and L. D. Xu, A reconfigurable smart sensor interface for industrial WSN in IoT environment, IEEE Transactions on Industrial Informatics, February 17, 2014.
4. S. Nuratch, A universal microcontroller circuit and firmware design and implementation for IoT-based realtime measurement and control applications, 2017 International Electrical Engineering Congress (iEECON), October 23, 2017.

5. Q. Gu, RF System Design of Transceivers for Wireless Communications, 1st edn. (Springer, New York, 2005), pp. 67-77.
6. A. A. Ignatius, D. C. Samjay, R. Prathish and A. I. Rexy, Automated Monitoring of Industrial Loads Using Iot and Control Using Wireless Technology, Middle-East Journal of Scientific Research, 2016.
7. I. Müller, T. Companhoni, M. Götz, C. Protasio, Development of a Wireless Current Measurement Sensor Node for IoT Applications, 2018 VIII Brazilian Symposium on Computing Systems Engineering (SBESC), April 18, 2019.

Acknowledgements

This research was supported by the Ministry of Science and Technology, Taiwan, R.O.C. under Grant: MOST 107-2218-E-150-001 and 107-2218-E-150-007.


Authors Introduction

Po-Yun Shih



He received the M.S. degree in Electrical Engineering from National Yunlin University of Science and Technology, Yunlin, Taiwan in 2020. His current research interests IoT Application.

Chung-Wen Hung



He received the Ph.D. degrees in Electrical Engineering from National Taiwan University in 2006. Currently he is an associate professor in National Yunlin University of Science & Technology. His research interests include IoT, IIoT, Power Electronics, Motor Control, AI Application.

Chau-Chung Song



He received the M.S. degree in Control Engineering in 1994 and the Ph.D. degree in Electrical and Control Engineering from National Chiao Tung University in 2001 at Taiwan. He is currently a distinguished professor in Department of Aeronautical Engineering, National Formosa University. His research interests include the analysis and control of nonlinear systems the integration application of networking information system, the UAV technology, and the cloud network and Cyber-Physical system (CPS).
