

## Research Article

# Design and Implementation of Quad-rotor UAV Based on Remote Control Equipment and Program

Junjie Lin, Chunxia Zhang, Yizhun Peng, Ting Zhao, Wangfeng He

College of Electronic Information and Automation, Tianjin University of Science and Technology, Tianjin, 300222, China

## ARTICLE INFO

## Article History

Received 09 November 2019

Accepted 27 November 2020

## Keywords

UAV

OpenMV module

IMU unit

## ABSTRACT

Quad-rotor UAV is an unmanned aircraft controlled by radio remote control equipment and independent program control device. In the past five years, unmanned intelligent equipment has attracted extensive attention. At present, the application of UAV in aerial photography, agriculture, plant protection, mapping and other fields has greatly expanded the application of UAV itself. Our UAV is based on TI MSP432, which can be connected to PC via USB port. This printed circuit board is used to transmit the program for the flight control of UAV. The OpenMV module serves as the data source of the line patrol controller, which is the top-level controller, the same level as the remote controller. The IMU unit calculates information to attitude controller, in order to keep the flight of UAV stable. After the IMU solution information is fused with the optical flow sensor, the information is sent to the horizontal controller to control the flight of the UAV in the horizontal direction. Similarly, After the IMU information is fused with the laser height information, the height controller is applied to control the flight height of UAV.

© 2022 The Author. Published by Sugisaka Masanori at ALife Robotics Corporation Ltd.  
This is an open access article distributed under the CC BY-NC 4.0 license  
(<http://creativecommons.org/licenses/by-nc/4.0/>).

## 1. Introduction

With the rapid development of the times and the rise of the intelligence of unmanned devices, the unmanned intelligent devices have received extensive attention in the past 5 years. Four rotor UAV is a kind of UAV controlled by radio remote control equipment and independent program control device [1]. At present, the application of UAV in aerial photography, agricultural plant protection, mapping and other fields has greatly expanded the use of UAV itself [2][3].

Compared with the general aircraft, unmanned aerial vehicles in both military and civilian aspects of the wide range of applications. The advantage of drones is that they can remotely control the aircraft and can even execute in accordance with prescribed procedures, thereby freeing up human resources.

Based on the above discussion, this design focuses on the basic function realization of UAV and the realization of camera and line patrol function based on OpenMV. This design system uses MSP432 microcontroller of TI

company for flight control, OpenMV3 camera for machine vision processing [4], optical flow sensor and other technologies, through program design and hardware production, the UAV can complete various tasks. In various fields of military and residential life, the design has a very high practical value.

## 2. Main control device

### 2.1. Selection of controller

With the development of electronic technology, we have more possibilities in the selection of main controller. Our team had planned to use STM32 single-chip computer and TI series single-chip computer respectively to carry out the flight control experiment of the line patrol robot.

Compared with 51 single-chip microcomputer, STM32 single-chip microcomputer has the advantages of faster processing speed and more peripheral serial ports. Besides, our team members are familiar with the application of STM32 single-chip microcomputer. Therefore, we choose this single-chip microcomputer in the beginning. We read

Corresponding author's E-mail: [pengyizhun@tust.edu.cn](mailto:pengyizhun@tust.edu.cn), URL: [www.tust.edu.cn](http://www.tust.edu.cn)

the data collected by MPU6050 through the programming code, determined the state of the aircraft, and then carried out the corresponding data processing.

We find that in the flight control of Quad-rotor UAV, compared with TI series single-chip microcomputer, STM32 single-chip microcomputer has some disadvantages in program processing speed and power consumption. When the main controller of Quad-rotor UAV has a large amount of computation, STM32 cannot meet our requirements.

TI uses the Cortex-M kernel, which contains the access to the complete arm instruction set. In addition. It also includes the DSP extension instruction and a floating-point FPU module, which improves the performance compared with STM32. Therefore, after the discussion with team members, we chose TI series MSP432 single-chip microcomputer.

## 2.2. Control system scheme

We adopt the scheme of minimum system of single-chip microcomputer. The Smallest single-chip system with high-performance analog technology and a wealth of on-chip peripherals can significantly reduce the peripheral circuit design and reduce the difficulty of system design. It is very suitable for our system design, and this scheme has an efficient and flexible development environment

## 3. Machine vision tools

Optical flow is the apparent movement of the image brightness mode. Under certain conditions, the motion information of an object can be obtained based on the optical flow [5]. We install the optical flow sensor at the bottom of the drone, use the optical flow method to analyze the ground feature information collected by the camera, calculate the speed of the aircraft relative to the ground, and combine the speed obtained by the optical flow method with the speed obtained by the inertial element to obtain more accurate Data, and then obtain the relative position information of the aircraft through integration to achieve positioning. Optical flow methods are divided into two categories, dense and sparse. Among them, dense optical flow calculation is complex and requires a large amount of resources. It requires the processor to have high computing power, so it cannot be applied to embedded platforms [6].

The maximum output of Ov7725 camera collected image information is 300,000 pixel images, which is smaller than the maximum output pixel of OpenMV. Ov7725 has its own source crystal oscillator and voltage regulator chip, and has a FIFO frame buffer chip-the chip contains 384K FIASH. It can buffer two frames of QVGA image data, but the stability is relatively poor.

OpenMV is an embedded camera with STM32 as the processing core. It is equipped with micro Python interpreter and supports Python Programming on the embedded. This system uses OpenMV instead of computer to carry out a series of image acquisition and processing tasks, and can directly control the pan tilt system, simplifying the structure of the system, making the whole system less cost, smaller volume, and easier to apply to real life scenarios. When the whole moving target tracking system works offline, the system only takes up 10 cm \* 10 cm \* 10 cm space, which is incomparable with another scheme. In addition, the anti-interference ability of OpenMV is stronger than that of Ov7725 camera.

To sum up, our team decided to choose the OpenMV3 camera and use Python language for machine vision processing. OpenMV is shown in the Fig.1.



Fig.1. OpenMV

## 4. Microcontroller

MSP430 is a 16-bit simplified instruction set microcontroller. Developers can flexibly write common systems, including timers, input/output expanders, system reset controllers, electrically erasable programmable read-only memory (EEPROM), etc.

32 in MSP432 represents that the MCU is 32-bit. Compared with 16-bit RISC (reduced instruction set) MSP430, MSP432 adopts 32-bit RISC, which greatly improves the performance. While optimizing the performance, the power loss is reduced, and its effective power consumption and standby power consumption are only 95  $\mu$  A/MHz and 850nA/MHz respectively. After comprehensive consideration, we choose MSP432 controller. MSP432 board is designed as shown in the Fig.2.



Fig.2. MSP432 board

## 5. Mpu6050 sensor

Mpu-6050 is the first integrated 6-axis motion processing component in the world. Compared with the multi-component scheme, Mpu-6050 avoids the problem of the difference between the time axis of the combined gyroscope and the accelerometer, and reduces a lot of packaging space. Mpu-6050 has a full sensing range of  $\pm 250$ ,  $\pm 500$ ,  $\pm 1000$  and  $\pm 2000^\circ/\text{sec}$ (DPS), which can accurately track fast and slow movements.

### 5.1. Calculation

The mpu6050 sensor has an internal digital LPF, which can be modified by setting the value of the config register.

This is the initialization program of mpu6050 sensor written by our team during the calculation.

```
I2C_Write_Byte(MPU6050_ADDRESS,
PWR_MGMT_1, 0x80);
I2C_Write_Byte(MPU6050_ADDRESS, SMPLRT_DIV,
0x00); 0x00(1000Hz)
I2C_Write_Byte(MPU6050_ADDRESS,
PWR_MGMT_1, 0x03);
I2C_Write_Byte(MPU6050_ADDRESS, CONFIGL,
0x04); 0x04(20Hz)
I2C_Write_Byte(MPU6050_ADDRESS,
GYRO_CONFIG, 0x18);
I2C_Write_Byte(MPU6050_ADDRESS,
ACCEL_CONFIG, 0x18);
```

### 5.2. Automatic correction (triaxial acceleration sensor)

$${}^b a_m = T_a K_a ({}^b a'_m + b'_a)$$

## 6. UAV attitude control

We use PID to control the position of the aircraft to obtain the desired speed, and obtain the actual speed based on the sensor fusion. The PID is used to control the speed of the aircraft, and then the closed-loop PID control algorithm is used to control the attitude of the aircraft [7]. In attitude control, we need to know three values: quaternion, rotation matrix and Euler angle.

If one need to convert vectors between coordinate systems, one method can be in matrix form; the other method is to use Euler angles as the "master copy" of the orientation, but at the same time maintain a rotation matrix. When the Euler angles change, The matrix must also be updated at the same time. When a large amount of orientation data (such as animation) needs to be saved, Euler angles or quaternions are used. Euler angles occupy 25% less memory, but conversion to matrix is slow. If the animation data needs to nest the connection between coordinate systems, quaternions may be the best choice. Smooth

interpolation can only use quaternions. In other forms, we must turn to quaternion, then turn back after interpolation, and then get the attitude solution [8] [9].

## 7. Hardware circuit design

### 7.1. Overall system diagram

The overall diagram of the system is shown in the Fig.3.


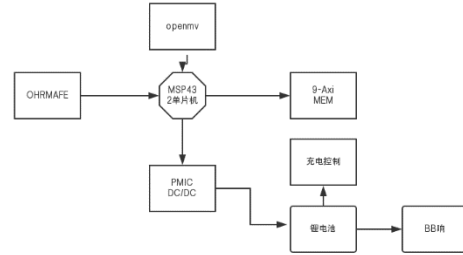


Fig.3. Overall system diagram

### 7.2. Circuit diagram

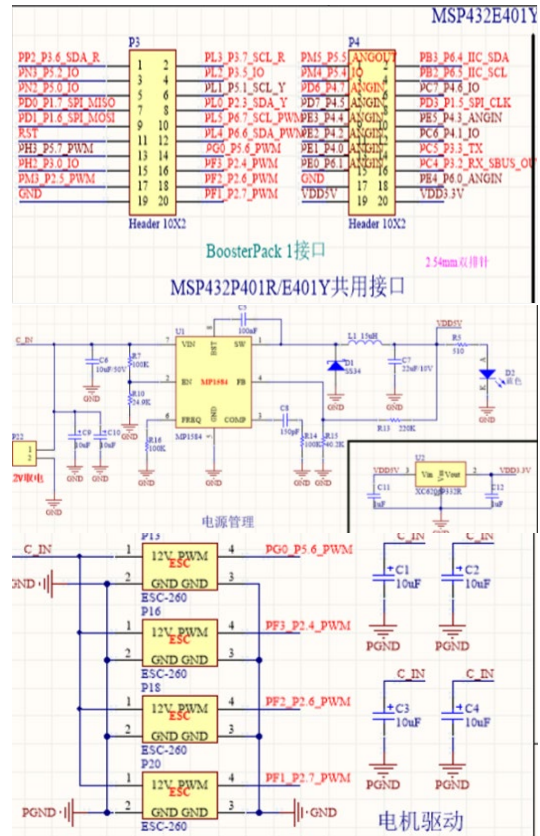

### 7.3. Power supply

The power supply consists of transformer, filter and regulator. Provide 5V or 12V voltage for the whole system to ensure the normal and stable operation of the circuit. This part of the circuit is realized by 3 terminal voltage-regulator tube.

### 8. Program design

The program design is divided into two parts, which are written by different members. The first part is the control of the aircraft, including take-off, hover height determination, rotation, horizontal flight and landing, etc. The second part is the OpenMV self-process, including color and line recognition, shooting, storage and so on.

The main idea of our program design is to use C language to write a one-key takeoff program, and then use keil5 software and optical flow sensor to achieve the altitude and stability of the quadrotor.

After that, the OpenMV and the flight controller are jointly adjusted to realize the cable-tracking flight of the aircraft. At the same time, program of the OpenMV realizes the function of taking pictures and storing during the flight

### 9. Test plan and result analysis

According to the requirements of UAV safety performance, we set up the experimental site in our laboratory and carried out many tests. The main testing instruments and instruments we use are: MSP432 microcontroller, optical flow sensor, OpenMV3cam7 camera, HIGHDISCHARGELI-POBATTERY lithium battery and sw-lds50a laser module.

Through the above module and the corresponding program, we have been able to achieve the line finding and basic flight, and can achieve the function of fixed height and camera shooting storage.

### Acknowledgements

This research was supported by Student's Platform for Innovation and Entrepreneur Training Program, Tianjin University of Science and Technology(201910057245).

### References

1. Tang Qiang, Zhu Zhiqiang, Wang Jianyuan. Research on Autonomous Flight Control of Foreign UAVs [J]. System Engineering and Electronics, 2004, 26 (3)
2. Tang Shufang. Research on four rotor aircraft technology based on optical flow positioning [D]. Nanjing. Nanjing University of Aeronautics and Astronautics

3. Chao Hai Yang, Cao Yong Can, Chen Yang Quan. Autopilots for small unmanned aerial vehicles: A survey[J]. International journal of control, automation, and systems, 2010, 8 (1)
4. Chen Kaiyue. Design and implementation of machine vision test system based on image processing [D]. Hebei University of science and technology. 2017
5. Jiu Ruibo. Airborne video stabilization algorithm based on FAST-9 corner and optical flow method [J]. Science and Technology Information. 2019 (01)
6. Fankhauser P, Hutter M. ANYmal: A Unique Quadruped Robot Conquering Harsh Environments[J]. Research Features, 2018(126):54-57.
7. Gu Zhixin, Yao Bo, Xu Kaihong, et al. Research on rock sheep limbs dynamics analysis and related technologies. J Xi. Development and innovation of mechanical and electrical products, 2010, 23 (J).
8. Song Yu, Song Junwei. Design simulation of attitude stability controller for four rotor UAV [J]. Computer simulation. 2017 (08)
9. Huang Jiaqi, Wu Xiaoyan, Zhang Rui, Ma Zhen. Research on optimal control of attitude stability of four rotor aircraft [J]. Computer simulation. 2016 (07)

---

---

### Authors Introduction

Mr. Junjie Lin



He is now an undergraduate in Tianjin University of Science & Technology. His research field is communication and signal processing.

Dr. Chunxia Zhang



She is an Associate Professor in Tianjin University of Science & Technology. She obtained a doctor's degree in information and control from the Institute of Modern Physics, Chinese Academy of Sciences, in 2005. Her research field is exchange principle and communication technology.

Dr. Yizhun Peng



He is an Associate Professor in Tianjin University of Science & Technology. He received a doctor's degree in control theory and control engineering from the Institute of Automation, Chinese Academy of Sciences, in 2006. His research field is intelligent robot and intelligent control.

Miss. Ting Zhao



She is now an undergraduate student at Tianjin University of Science&Technology. Her research field is control science and control engineering, and intelligent control is her research direction.

Miss. Wangfeng He



She is now an undergraduate student at Tianjin University of Science & Technology. Her research field is communication and signal processing.