

Neutral Networks-Based Adaptive Fixed-Time Consensus Tracking Control for Uncertain Multiple AUVs

Lin Zhao

*College of Automation and Electrical Engineering, Qingdao University, 308 Ningxia Road, Shinan District
Qingdao, 266071, China*

Yingmin Jia

*The Seventh Research Division and the Center for Information and Control, School of
Automation Science and Electrical Engineering, Beihang University (BUAA), 37 Xueyuan Road, Haidian District
Beijing, 100191, China*

Jinpeng Yu

*College of Automation and Electrical Engineering, Qingdao University, 308 Ningxia Road, Shinan District
Qingdao, 266071, China*

*E-mail: zhaolin1585@163.com, ymjia@buaa.edu.cn, yjp1109@hotmail.com
<http://www.qdu.edu.cn/>*

Abstract

This paper is concerned with the fixed-time consensus tracking problem for multi-AUV (autonomous underwater vehicle) systems with uncertain parameters and external disturbances. Firstly, a fixed-time terminal sliding mode is proposed, which can avoid the singularity problem. Then, a continuous distributed consensus tracking control law is designed based on Neutral Network approximation technique, which can guarantee the consensus tracking errors converge to the desired regions in fixed time. A simulation example is given to show the effectiveness of proposed methods.

Keywords: Multi-AUV systems; Terminal sliding mode; fixed-time stability; Neutral Networks.

1. Introduction

Distributed cooperative control of multiple AUVs has been paid to much attention due to its potential applications in oceanographic surveys and deep sea inspections [1]. The distributed cooperative control for multi-AUV systems has been investigated by using the backstepping technique [2] and the adaptive control

approach [3]. However, the protocols proposed in them can only guarantee the closed-loop system is asymptotically stable. For the distributed cooperative control, one significant requirement is the fast convergence rate. Compared with the asymptotic control approaches, the finite-time control approaches can not only provide fast convergence rate but also provide higher tracking precision and better disturbance

rejection ability [4]. Therefore, many finite-time control laws are proposed for various multi-agent systems in the past few years [5]–[7]. However, the settling time can be estimated dependent on the initial conditions of systems in there. In practical applications, we desire that the settling time is estimated independent on the initial conditions of systems. In this paper, we will further investigate the adaptive finite-time consensus tracking problem for multiple AUVs with uncertain dynamics using fixed-time terminal sliding mode.

2. Systems Description

This paper considers the networked multiple AUV system with n following AUVs and one virtual leader, and the communications among them are described by a digraph \bar{G} . The definitions and descriptions of graph \bar{G} are given in [7] and [9], which is omitted for brevity. Assume that all the following AUVs have fixed attitudes. The translational dynamics of the i -th AUV ($i \in V$) are given as [10]:

$$\begin{aligned} \dot{p}_i &= R_i(\Theta_i)v_i \\ M_i\dot{v}_i &= -D_i(v_i)v_i - g_i(\Theta_i) + \tau_i + w_i \end{aligned} \quad (1)$$

where $p_i = [x_i, y_i, z_i]^T$, $\Theta_i = [\phi_i, \theta_i, \psi_i]^T$ denote position and attitude vectors in the inertial reference frame, respectively, $R_i(\Theta_i)$ is the kinematic transformation matrix, $v_i = [u_i, v_i, \omega_i]^T$ is translational velocity vector in the body-fixed reference frame, M_i is the inertia matrix, $D_i(v_i)$ is the damping matrix, $g_i(\Theta_i)$ is there storing force vector, $\tau_i \in \mathfrak{R}^3$ is the control force vector, and $w_i \in \mathfrak{R}^3$ is the disturbance force vector. $M_i, R_i(\Theta_i), D_i(v_i), g_i(\Theta_i)$ are defined in [10]. In this paper, we assume that $D_i(v_i)$ and $g_i(\Theta_i)$ have uncertain parameters. Note that $R_i R_i^T = I$. Denote $p_d \in \mathfrak{R}^3$ as the state vector of virtual leader and \dot{p}_d, \ddot{p}_d are all assumed to be smooth, bounded and known functions.

Assumption 1. \bar{G} has a spanning tree, and the leader node is the root node.

3. Main results

3.1. Fixed-time terminal sliding mode (FTTSM)

Denote

$$\begin{aligned} e_{1i} &= \sum_{j=1}^n a_{ij} (p_i - p_j) + b_i (p_i - p_d) \\ e_{2i} &= \sum_{j=1}^n a_{ij} (\dot{p}_i - \dot{p}_j) + b_i (\dot{p}_i - \dot{p}_d) \end{aligned} \quad (2)$$

Then, we have $e_1 = (H \otimes I)E_1, e_2 = (H \otimes I)E_2$, where $e_1 = [e_{11}^T, \dots, e_{1n}^T]^T, e_2 = [e_{21}^T, \dots, e_{2n}^T]^T, E_1 = [E_{11}^T, \dots, E_{1n}^T]^T, E_2 = [E_{21}^T, \dots, E_{2n}^T]^T, E_{1i} = p_i - p_d, E_{2i} = \dot{p}_i - \dot{p}_d$.

Now, define the FTTSM vector as $s = [s_1^T, \dots, s_n^T]^T$, where $s_i = [s_{i1}, s_{i2}, s_{i3}]^T \in \mathfrak{R}^3$ is given by

$$s_i = e_{2i} + \alpha_i (e_{1i}) \quad (3)$$

with $\alpha_i (e_{1i}) = [\alpha_i (e_{1i1}), \alpha_i (e_{1i2}), \alpha_i (e_{1i3})]^T$, and

$$\alpha_{i\chi} (e_{1i\chi}) = \begin{cases} \text{sig} \left(\sigma_{1i} \text{sig} (e_{1i\chi})^{m_1} + \sigma_{2i} \text{sig} (e_{1i\chi})^{n_1} \right)^{k_1}, \\ \text{if } \bar{s}_{i\chi} = 0 \text{ or } \bar{s}_{i\chi} \neq 0, |e_{1i\chi}| > \phi \\ l_{1i} e_{1i\chi} + l_{2i} \text{sig} (e_{1i\chi})^2, \text{ if } \bar{s}_{i\chi} = 0, |e_{1i\chi}| \leq \phi \end{cases} \quad (4)$$

$\chi = 1, 2, 3, \bar{s}_i = [\bar{s}_{i1}, \bar{s}_{i2}, \bar{s}_{i3}]^T, \bar{s} = \text{sig}(\sigma_{1i} \text{sig}(e_{1i\chi})^{m_1} + \sigma_{2i} \text{sig}(e_{1i\chi})^{n_1})^{k_1}, m_1, n_1, k_1 \in \mathfrak{R}^+, 0 < m_1 k_1 < 1, n_1 k_1 > 1, l_{1i} = (2 - k_1)(\sigma_{1i} \phi^{m_1 - \frac{1}{k_1}} + \sigma_{2i} \phi^{\frac{1}{k_1}})^{k_1}, l_{2i} = (k_1 - 1)(\sigma_{1i} \phi^{m_1 - \frac{2}{k_1}} + \sigma_{2i} \phi^{\frac{n_1 - 2}{k_1}})^{k_1}, \phi > 0$.

From (3), we can obtain the following equation

$$\dot{s}_i + s_i = \dot{e}_{2i} + \dot{\alpha} + e_{2i} + \alpha_i \quad (5)$$

From the definition of e_{2i} , we further have

$$\dot{e}_{2i} = (d_i + b_i) \ddot{p}_i - \sum_{j=1}^n a_{ij} \ddot{p}_j - b_i \ddot{p}_d \quad (6)$$

and from (1), we can obtain

$$\ddot{p}_i = h_i + R_i(\Theta_i) M_i^{-1} \tau_i + R_i(\Theta_i) M_i^{-1} w_i \quad (7)$$

where $h_i = \dot{R}_i v_i - R_i M_i^{-1} D_i v_i - R_i M_i^{-1} g_i$. Assume that $\|(d_i + b_i) R_i(\Theta_i) M_i^{-1} w_i\| \leq \bar{w}_i^*, \bar{w}_i^*$ is an unknown constant. Then, substituting (6) into (5) yields

$$\dot{s}_i + s_i = (d_i + b_i) R_i(\Theta_i) M_i^{-1} \tau_i + (d_i + b_i) R_i(\Theta_i) M_i^{-1} w_i + \Phi_i \quad (8)$$

where $\Phi_i = -\sum_{j=1}^n a_{ij} \ddot{p}_j - b_i \ddot{p}_d + \dot{\alpha} + e_{2i} + \alpha_i + (d_i + b_i) h_i$.

3.2. Control law design

From the approximation property of RBF Neural Networks (NNs), we have

$$\Phi_i = W_i^T \Gamma_i(Z_i) + \zeta_i \quad (9)$$

where $Z_i = [p_i^T, \dot{p}_i^T, p_j^T, \dot{p}_j^T, \ddot{p}_j^T, p_d^T, \dot{p}_d^T, \ddot{p}_d^T]^T$ and $\|\zeta_i\| \leq \xi_i^*$, $\xi_i^* > 0$ is a constant. Denote $\hat{\rho}_i$ as the estimate of $\rho_i = \|W_i\|^2$, then the adaptation law is designed as

$$\dot{\hat{\rho}}_i = -2\kappa_i \iota_i \hat{\rho}_i + \frac{\kappa_i}{2h_i^2} s_i^T \Gamma_i^T \Gamma_i \quad (10)$$

where κ_i, ι_i, h_i are designed positive constants.

Theorem 1. Suppose that Assumption 1 holds for system (1), then we can choose the control law

$$\tau_i = -\frac{1}{d_i + b_i} M_i R_i^T \left(\mu_{i1} \text{sig}(s_i)^{m_2} + \mu_{i2} \text{sig}(s_i)^{n_2} + \frac{1}{2h_i^2} \hat{\rho}_i \Gamma_i^T \Gamma_i s_i \right) \quad (11)$$

where $\mu_{i1} > 0, \mu_{i2} > 0, 0 < m_2 < 1, n_2 > 1$, such that s_i converges into the region

$$\|s_i\| \leq \Delta_s = \min \left\{ 2\mu_{i1}^{-\frac{1}{1+m_2}} \left(\frac{\Xi}{1-\Xi_0} \right)^{\frac{1}{1+m_2}}, 2 \left(\mu_{i2} \left(\frac{1}{2^{\frac{n_2+1}{2}} - 1} \right) \right)^{\frac{1}{1+n_2}} \left(\frac{\Xi}{1-\Xi_0} \right)^{\frac{1}{1+n_2}} \right\}$$

in fixed time, the local neighborhood state errors

$e_{1i\chi}$ and $e_{2i\chi}, \chi = 1, 2, 3$ converge into the

regions $\Delta_{e_{1i}}$ and $\Delta_{e_{2i}}$ respectively in fixed time, and

finally the vectors E_1 and E_2 converge into regions

Δ_{E_1} and Δ_{E_2} respectively in fixed time, where

$$\begin{aligned} \Delta_{e_{1i}} &= \max \left\{ \phi, \left(\frac{\Delta_s}{\sigma_{1i}} \right)^{\frac{1}{m_1}}, \left(\frac{\Delta_s}{\sigma_{2i}} \right)^{\frac{1}{n_1}} \right\}, \\ \Delta_{e_{2i}} &= \max \left\{ \Delta_s + l_{1i} \Delta_{e_{1i}} + l_{2i} \Delta_{e_{1i}}^2, \Delta_s + (\sigma_{1i} \Delta_{e_{1i}}^{m_1} + \sigma_{2i} \Delta_{e_{1i}}^{n_1})^{k_1} \right\}, \\ \mu_{1i} &= \min \left\{ \mu_{1i\min} 2^{\frac{m_2+1}{2}}, \varsigma_i 2^{\frac{m_2+1}{2}} \right\}, \mu_{1i\min} = \min \{ \mu_{1i} \}, \\ \varsigma_{\min} &= \min \{ \varsigma_i \}, \mu_{2i} = \min \left\{ \mu_{2i\min} 2^{\frac{n_2+1}{2}}, \varsigma_i 2^{\frac{n_2+1}{2}} \right\}, \\ \mu_{2i\min} &= \min \{ \mu_{2i} \}, \varsigma_i = \kappa_i \frac{\rho_i (2o_i - 1)}{2o_i}, \\ o_i &> \frac{1}{2}, 0 < \Xi_0 \leq 1, \Delta_{E_1} = \frac{\sqrt{3 \sum_{i=1}^n \Delta_{e_{1i}}^2}}{\sigma_{\min}(H)}, \Delta_{E_2} = \frac{\sqrt{3 \sum_{i=1}^n \Delta_{e_{2i}}^2}}{\sigma_{\min}(H)}. \end{aligned}$$

Proof. Denote $\tilde{\rho}_i = \rho_i - \hat{\rho}_i$, and choose the Lyapunov function as

$$V = \frac{1}{2} S^T S + \frac{1}{2} \sum_{i=1}^n \frac{1}{\kappa_i} \tilde{\rho}_i^2 \quad (12)$$

we have

$$\dot{V} \leq -\sum_{i=1}^n s_i^T s_i + \sum_{i=1}^n s_i^T (d_i + b_i) R_i M_i^{-1} \tau_i + \sum_{i=1}^n \bar{w}_i^* \|s_i\| + \sum_{i=1}^n s_i^T \Phi_i \quad (13)$$

From

$$\begin{aligned} s_i^T \Phi_i &\leq \frac{1}{2h_i^2} s_i^T s_i \|W_i\|^T \Gamma_i^T \Gamma_i + \frac{1}{2} h_i^2 + \frac{1}{2} s_i^T s_i + \frac{1}{2} \xi_i^{*,2} \\ \bar{w}_i^* \|s_i\| &\leq \frac{1}{2} s_i^T s_i + \frac{1}{2} \bar{w}_i^{*,2} \end{aligned} \quad (14)$$

Substituting (10), (11), (14) into (13) yields

$$\begin{aligned} \dot{V} &\leq -\sum_{i=1}^n \sum_{\chi=1}^3 \mu_{i\chi} |s_{i\chi}|^{m_2+1} - \sum_{i=1}^n \sum_{\chi=1}^3 \mu_{i2} |s_{i\chi}|^{n_2+1} + \sum_{i=1}^n 2\iota_i \tilde{\rho}_i \hat{\rho}_i \\ &\quad + \frac{1}{2} \sum_{i=1}^n (\bar{w}_i^{*,2} + \xi_i^{*,2}) \end{aligned} \quad (15)$$

Using the similar proof as in [9], we have

$$\begin{aligned} \dot{V} &\leq -\mu_1 V^{\frac{m_2+1}{2}} - \mu_2 \left(\frac{1}{2^{\frac{n_2+1}{2}} - 1} \right) V^{\frac{n_2+1}{2}} + \sum_{i=1}^n \left(\frac{\varsigma_i}{\kappa_i} \tilde{\rho}_i^2 \right)^{\frac{m_2+1}{2}} \\ &\quad - \sum_{i=1}^n \frac{\varsigma_i}{\kappa_i} \tilde{\rho}_i^2 + \sum_{i=1}^n \iota_i o_i \rho_i^2 + \frac{1}{2} \sum_{i=1}^n (\bar{w}_i^{*,2} + \xi_i^{*,2}) \end{aligned} \quad (16)$$

Suppose that there exists a compact set Υ such that $\Upsilon = \{ \tilde{\rho}_i \mid |\tilde{\rho}_i| \leq \Delta \}$, then we have

$$\begin{aligned} \Xi &= \begin{cases} \sum_{i=1}^n \iota_i o_i \rho_i^2 + \frac{1}{2} \sum_{i=1}^n (\bar{w}_i^{*,2} + \xi_i^{*,2}), & \text{if } \Delta < \min \left\{ \sqrt{\frac{\kappa_i}{\varsigma_i}} \right\} \\ \sum_{i=1}^n \iota_i o_i \rho_i^2 + \sum_{i=1}^n \left(\frac{\varsigma_i}{\kappa_i} \Delta^2 \right)^{\frac{m_2+1}{2}} - \sum_{i=1}^n \frac{\varsigma_i}{\kappa_i} \Delta^2 + \\ \frac{1}{2} \sum_{i=1}^n (\bar{w}_i^{*,2} + \xi_i^{*,2}), & \text{if } \Delta \geq \min \left\{ \sqrt{\frac{\kappa_i}{\varsigma_i}} \right\} \end{cases} \end{aligned} \quad (17)$$

From (16) and (17), we can further obtain

$$\dot{V} \leq -\mu_1 V^{\frac{m_2+1}{2}} - \mu_2 \left(\frac{1}{2^{\frac{n_2+1}{2}} - 1} \right) V^{\frac{n_2+1}{2}} + \Xi \quad (18)$$

It can be seen from Lemma 2 in [8] that the system (12) is practical fixed-time stability. Moreover, s_i will converge into the region $\|s_i\| \leq \Delta_s$ in fixed settling time. The next proofs are similar with that of [7] and [9], thus are omitted for brevity.

4. Simulations

We consider a direct network with three AUVs and a virtual leader, the matrices L and B are described as:

$$L = \begin{bmatrix} 0 & 0 & 0 \\ -1 & 1 & 0 \\ -1 & 0 & 1 \end{bmatrix}, B = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & 0 \end{bmatrix}$$

We assume that all the AUVs have the same structure and the model parameters are $M_i = \text{diag}\{175.4, 140.8, 140.8\}$, $D_i = \{120 + 90|u_i|, 90 + 90|v_i|, 150 + 90|\omega_i|\}$, $\phi_i = \pi/5$, $\theta_i = -\pi/10$, $\psi_i = \pi/12$ [10]. The response curves under control law (11) are shown in Fig. 1. Note that the control law (11) can ensure the closed-loop system has desired robustness.

5. Conclusions

This paper studied the fixed-time consensus tracking control of Multiple AUVs. AFTTSM based adaptive chattering-free control law was designed, which could guarantee the closed-loop system had desired fixed-time tracking performance.

Acknowledgements

This work was supported by the National Natural Science Foundation of China (61603204), Natural Science Foundation of Shandong Province (ZR2016FP03), Project funded by China Postdoctoral Science Foundation (2017M612206) and Qingdao Application Basic Research Project (16-5-1-22-jch).

References

1. T. I. Fossen, *Marine control systems: guidance, navigation and control of ships, rigs and underwater vehicles* (Trondheim: Marine Cybernetics, 2002).
2. R. S. Cui, S. BGe, V. E. How and Y. S. Choo, Leader-follower formation control of underactuated autonomous underwater vehicles, *Ocean Engineering*, **37**(17–18)(2010) 1491–1502.
3. S. P. Hou and C. C. Cheah, Can a simple control scheme work for a formation control of multiple autonomous underwater vehicles?, *IEEE Trans. Contr. Syst. Tech.*, **19**(5) (2011) 1190–1201.

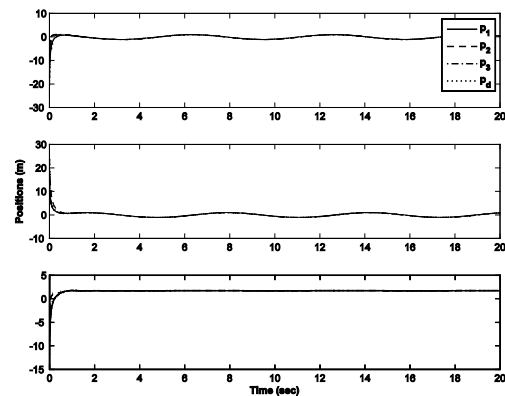


Fig. 1. Response curves of p_d and $p_i(i=1,2,3)$ under control law (11).

4. L. Zhao and Y. Jia, Finite-time attitude tracking control for a rigid spacecraft using time-varying terminal sliding mode techniques, *Int. J. Control*, **88**(6) (2015) 1150-1162.
5. S. Li, H. Du and X. Lin, Finite-time consensus algorithm for multi-agent systems with double-integrator dynamics, *Automatica*, **47**(8) (2011) 1706-1712.
6. D. Meng, Y. Jia and J. Du, Nonlinear finite-time bipartite consensus protocol for multi-agent systems associated with signed graphs, *Int. J. Control*, **88**(10) (2015) 2074-2085.
7. L. Zhao and Y. Jia, Decentralized adaptive attitude synchronization control for spacecraft formation using nonsingular fast terminal sliding mode, *Nonlinear Dyn.*, **78**(4) (2014) 2779-2794.
8. B. Jiang, Q. Hu and M. I. Friswell, Fixed-time attitude control for rigid spacecraft with actuator saturation and faults, *IEEE Trans. Contr. Syst. Tech.*, **24**(5) (2016) 1892-1898.
9. L. Zhao, J. P. Yu, C. Lin and H. S. Yu, Distributed adaptive fixed-time consensus tracking for second-order multi-agent systems using modified terminal sliding mode, *Appl. Math. Comput.*, **312** (2017) 23-35.
10. S. Li and X. Y. Wang, Finite-time consensus and collision avoidance control algorithms for multiple AUVs, *Automatica*, **49**(11) (2013) 3359-3367.